



# Manual

Version  
September 2022



**MASON 12V20Ah | 12V25Ah**



## User Manual Mason 12V20Ah | 12V25Ah

This manual contains all the information necessary to install, use and maintain the Li-ion battery. We kindly ask you to read this manual carefully before using the product. In this manual, the Super B Mason 12V20Ah / 12V25Ah Li-ion power battery will be referred to as the Li-ion battery. This manual is meant for the installer and the user of the Li-ion battery. Only qualified and/or certified personnel may install and perform maintenance on the Li-ion battery. Please consult the index at the start of this manual to locate information relevant to you.

During the use of the Li-ion battery, user safety should always be ensured, so installers, users, service personnel and third parties can safely use the Li-ion battery.

Copyright© Super B All rights reserved. Licensed software products are owned by Super B or its subsidiaries or suppliers, and are protected by national copyright laws and international treaty provisions. Super B products are covered by Dutch and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specifications and price change privileges reserved. Super B is a registered trademark of Super B.

For more information please contact:

Super B Lithium Power B.V.  
Europalaan 202  
7559 SC Hengelo (Ov)  
The Netherlands  
Tel: +31(0)88 00 76 000  
E-mail: [info@super-b.com](mailto:info@super-b.com)  
www: [www.super-b.com](http://www.super-b.com)

# Table of content

<b>1. Safety guidelines and measures</b>	<b>5</b>
1.1. General	5
1.2. Disposal	5
1.3. Safety symbols and markings on product	6
<b>2. Introduction</b>	<b>7</b>
2.1. Product description	7
2.2. Intended use	7
2.3. Glossary of Terminology	7
2.4. Used symbols	8
<b>3. Product specifications</b>	<b>8</b>
3.1. Technical specifications	8
3.1.1. Electrical specifications	8
3.1.2. Mechanical specifications	8
3.1.3. Charge and discharge specifications	9
3.1.4. Temperature specifications	9
3.1.5. Compliance specifications	9
3.1.6. General product specifications	9
3.2. Environmental conditions	10
3.3. Required tools	10
3.4. Scope of delivery	10
3.5. Connections	11
3.6. Optional Components	11
3.7. Protection tresholds	11
<b>4. Installation</b>	<b>12</b>
4.1. General information	12
4.2. Unpacking	12
4.3. Preparing the Li-ion battery for use	12
4.3.1. Placement of the Li-ion battery	13
4.3.2. Connection wires	13
4.3.3. Connecting a charger or load to the Li-ion battery	13
4.4. Disconnecting a Li-ion battery	14
<b>5. Battery use</b>	<b>14</b>
5.1. General information	14
5.2. Charging	14
5.2.1. Charging rate	15
<b>6. Inspection and cleaning</b>	<b>15</b>
6.1. General information	15
6.2. Inspection	15



6.3. Cleaning	16
<b>7. Storage</b>	<b>16</b>
<b>8. Transportation</b>	<b>16</b>
<b>9. Disposal and recycling</b>	<b>16</b>
<b>10. Troubleshooting</b>	<b>17</b>
<b>11. Warranty and liability</b>	<b>18</b>

# 1. Safety guidelines and measures

## 1.1. General

- Do not short-circuit the Li-ion battery.
- Treat the Li-ion battery as described in this manual.
- Do not dismantle, crush, puncture, open or shred the Li-ion battery.
- Do not expose the Li-ion battery to heat or fire. Avoid exposure to direct sunlight.
- Do not remove the Li-ion battery from its original packaging until required for use.
- In the event of electrolyte leaking, do not allow the liquid to come in contact with the skin or eyes. If contact has been made, wash the affected area with water and seek medical advice.
- Always use a class 2 charger which is specifically provided for use with a Lithium Iron Phosphate battery (LiFePO4).
- Observe the plus (+) and minus (-) marks on the Li-ion battery and equipment and ensure correct use.
- Do not mix batteries of different manufacture, capacity, size or type.
- Keep the Li-ion battery clean and dry.
- Secondary batteries need to be charged before use. Always use the correct charger and refer this manual for proper charging instructions.
- Do not leave the Li-ion battery on prolonged charge when not in use.
- After extended periods of storage, it may be necessary to charge and discharge the Li-ion battery several times to obtain maximum performance.
- Retain the original product documentation for future reference.
- Disconnect the Li-ion battery from the equipment when not in use.
- Do not charge the Li-ion battery below 0°C.

## 1.2. Disposal



Dispose the Li-ion battery in accordance with local, state and federal laws and regulations.

Batteries may be returned to the manufacturer.







Do not mix with other (industrial) waste.

### 1.3. Safety symbols and markings on product

Several safety symbols and markings can be found on the product. These markings are displayed below. Never remove these markings!



The meanings of the symbols:

	Wear eye protection
	Refer to instruction manual/booklet
	Warning, corrosive substance
	Warning, explosive material
	No open flame, ignition source and smoking prohibited
	No children allowed

## 2. Introduction

### 2.1. Product description

The Mason 12V20Ah / 12V25Ah power battery is light-weighted, compact and offers high performance. Thanks to its lithium iron phosphate technology and integrated Battery Management System (BMS) this new generation battery is extremely reliable and offers optimal safety. The BMS constantly monitors the status of individual battery elements such as cell temperature, cell voltage, charge and discharge currents. The integrated BMS also provides cell balancing.

Please note that Li-ion batteries have to be treated differently from conventional lead-acid batteries. We kindly ask you to pay attention to the warnings as mentioned on the battery:

1. Risk of fire and burns when not used or treated correctly.
2. Do not open, crush, heat above 60°C or incinerate.
3. Follow manufacturer's instructions.
4. Avoid contact with electrolyte. In the event of an accident, flush with water.
5. Do not jumpstart.
6. Use correct charger.
7. Do not puncture or impact this battery.
8. Do not short battery terminals.
9. Do not reverse connect (polarity).
10. Do not operate battery beyond published maximum specifications.
11. This product can store fault conditions internally, like excessive charge current or deep discharge situations. Super B uses this information in the warranty process.

### 2.2. Intended use

The Mason series Li-ion battery serves as a voltage source for starting combustion engines, which use a 12V board net. Also stationary applications which require a short and high peak current can benefit from using this Li-ion battery. The Mason series Li-ion battery has an integrated BMS, which will monitor whether the battery is being misused and will then shut down to protect the Li-ion cells. Therefore it is not advised to use the battery in vehicles or systems where the battery voltage, current or temperature exceeds the specified working range. In these circumstances the battery will shut down and can cause damage to the 12V system if it is not designed for Li-ion battery use. Never install multiple Li-ion batteries in series or parallel.

### 2.3. Glossary of Terminology

Endurance Life-cycle:

The products maximum lifespan, achieved by following the guidelines presented in this manual

Charge cycle:	A period of use from fully charged, to fully discharged, and fully recharged again
CCCV:	Constant Current - Constant Voltage
LiFePO4	Lithium Iron Phosphate
BMS	Battery Management System

Table 1. Glossary of terminology

## 2.4. Used symbols

The following icons will be used throughout the manual:

- ⚠ **Warning!** A warning indicates severe damage to the user and/or product may occur when a procedure is not carried out as described.
- ⚠ **Caution!** A caution sign indicates problems may occur if a procedure is not carried out as described. It may also serve as a reminder to the user.

## 3. Product specifications

### 3.1. Technical specifications

#### 3.1.1. Electrical specifications

	Mason 12V20Ah	Mason 12V25Ah
Nominal capacity <sup>1</sup>	20Ah	25Ah
Energy	256Wh	320Wh
Nominal voltage	12.8V	12.8V
Open circuit voltage	13.2V	13.2V
Self-discharge	<3% per Month	<3% per Month
EqPb (Equals lead-acid battery)	70 to 100Ah	100 to 130Ah

Table 2. Electrical specifications.

<sup>1</sup>The nominal capacity may deviate by  $\pm 8\%$

#### 3.1.2. Mechanical specifications

	Mason 12V20Ah	Mason 12V25Ah
Dimensions (LxWxH)	255 x 101 x 171mm 10.0" x 4.0" x 6.7"	255 x 101 x 171mm 10.0" x 4.0" x 6.7"
Weight	4.6 kg / 10.1lbs	5.2 kg / 11.46lbs
Ingress protection	IP66	IP66
Cell type / chemistry	Cylindrical - LiFePO4	Cylindrical - LiFePO4

Table 3. Mechanical specifications



### 3.1.3. Charge and discharge specifications

	Mason 12V20Ah	Mason 12V25Ah
Charge method	CCCV	CCCV
Charge voltage	14.3V - 14.6V	14.3V - 14.6V
Max charge current	66A	77A
End of discharge voltage	8V	8V
Discharge current continuous	260A	260A
Discharge pulse current (1 sec)	892A (45C)	1000A (40C)

Table 4. Charge and discharge specifications

### 3.1.4. Temperature specifications

	Mason 12V20Ah	Mason 12V25Ah
Charge temperature	0°C to 55°C <sup>1</sup> / 32°F to 131°F <sup>1</sup>	0°C to 55°C <sup>1</sup> / 32°F to 131°F <sup>1</sup>
Discharge temperature	-30°C to 55°C / -22°F to 131°F	-30°C to 55°C / -22°F to 131°F
Storage temperature short term (<1 month)	-40°C to 60°C / -40°F to 140°F	-40°C to 60°C / -40°F to 140°F
Storage temperature long term (>1 month)	-10°C to 25°C / 14°F to 77°F	-10°C to 25°C / 14°F to 77°F <sup>2</sup>
Relative humidity	10-90%	10-90%

Table 5. Temperature specifications

<sup>1</sup>Do not charge the Li-ion battery below 0°C / 32°F

<sup>2</sup>Long term exposure to temperatures >35°C / 95°F might affect battery capacity and cycle life.

### 3.1.5. Compliance specifications

	Mason 12V20Ah	Mason 12V25Ah
Certifications	CE, FCC, UN 38.3, UN ECE R10	CE, FCC, UN 38.3, UN ECE R10
Shipping classification	UN 3480	UN 3480

Table 6. Compliance specifications

### 3.1.6. General product specifications

	Mason 12V20Ah	Mason 12V25Ah
Battery designation	4IFpR27/66-8	4IFpR27/66-10
Cycle life	>1000 (10C discharge, 100% DoD)	>1000 (10C discharge, 100% DoD)

Table 7. General product specifications

\*The cycle life given above is an indication at 23°C. Battery lifespan depends strongly on temperature and the applied charging and discharging currents.

### 3.2. Environmental conditions

- ⚠ Warning!** The Li-ion battery may only be used in conditions specified in this manual. Exposing the battery to conditions outside the specified boundaries may lead to serious damage to the product and/or the user.

Use the Li-ion battery in a dry, clean, dust free, well ventilated space. Do not expose the Li-ion battery to fire, water, solvents or excessive heat.

### 3.3. Required tools

- 10mm Hexagon socket wrench

### 3.4. Scope of delivery

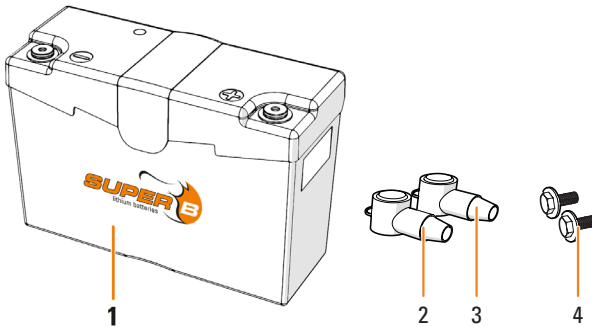


Figure 1. Scope of delivery

1. (1x) Mason Li-ion Power battery
2. (1x) Terminal cover, Red
3. (1x) Terminal cover, Black
4. (2x) M6 bolt

### 3.5. Connections

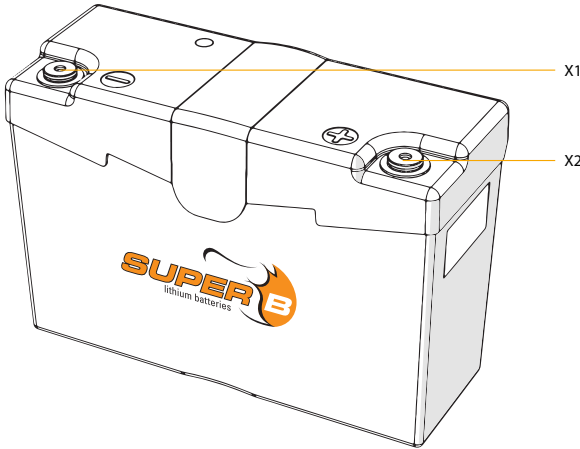


Figure 2. Connections

X1/X2: Battery Terminal for M6 bolt.

### 3.6. Optional Components

Article name	EAN code
Optimate charger 5.0 A/14.4V EU plug	5425006143905
Optimate charger 5.0 A/14.4V UK plug	5425006143905
Optimate charger 5.0 A/14.4V US plug	5425006143936

Table 8. Optional Components

### 3.7. Protection thresholds

The protection limits are implemented to protect the Li-ion battery from unintentional events that will damage the Li-ion battery. It is not advised to depend on these limits and the system itself should make sure that the Li-ion battery will always be within the specified working range.

Protection mechanism	Threshold
Overvoltage (cell/pack)	3.75 / 15V
Recovery overvoltage (cell/pack)	3.65 / 14.6V
Undervoltage (cell/pack)	2 / 8V
Recovery undervoltage (cell/pack)	2.3 / 9.2V
Short circuit current	1000A
Maximum continuous discharge current	330A
Maximum charge current	80A
Maximum discharge temperature	55°C / 131°F
Minimum discharge temperature	-30°C / -22°F
Maximum charge temperature	55°C / 131°F
Minimum charge temperature	0°C / 32°F

Table 9. Protection thresholds

## 4. Installation

### 4.1. General information

- ⚠ **Warning!** Never install or use a damaged Li-ion battery.
- ⚠ **Warning!** Never short circuit the Li-ion battery.
- ⚠ **Warning! Connect to 12V systems only.** Never install multiple Li-ion batteries in series.
- ⚠ **Warning!** Do not reverse connect the power cables (polarity).

### 4.2. Unpacking

Check the Li-ion battery for damage after unpacking. If the Li-ion battery is damaged, contact your reseller or Super B. Do not install or use the Li-ion battery if it is damaged!

### 4.3. Preparing the Li-ion battery for use

- ⚠ **Warning!** Do not overcharge the Li-ion battery.
- ⚠ **Warning!** Do not operate the Li-ion battery beyond published maximum specifications.

### 4.3.1. Placement of the Li-ion battery

Before it is used, the Li-ion battery must be positioned in such a way that it will not move around in its compartment during use.

Use appropriate brackets for mounting (see chapter 3.6 for optional components).

### 4.3.2. Connection wires

Use appropriate wire for the connection wires to prevent overheating and unnecessary losses.

### 4.3.3. Connecting a charger or load to the Li-ion battery

1. Connect the load or charger to the (+) terminal of the Li-ion battery (Figure 3).

**⚠ Warning!** Do not connect the (-) terminal first as this may lead to short circuits.

2. Connect the load or charger to the (-) terminal of the Li-ion battery (Figure 3).

3. Ensure both contacts are tightened (M6 = 10Nm).

**⚠ Warning!** Avoid short circuit when using a wrench.

4. Place the terminal covers over the terminals (Figure 4).

5. Connect the charger to the Li-ion battery (Figure 5).

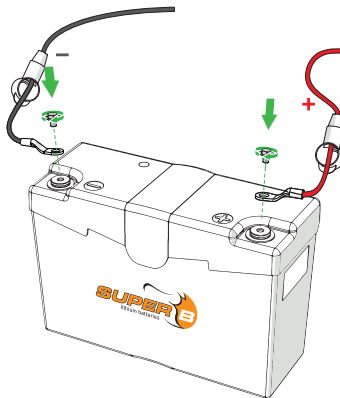


Figure 3. Connecting power cables to the Li-ion battery.

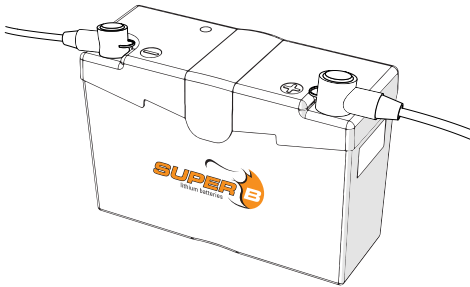


Figure 4. Place terminal covers over the terminals.

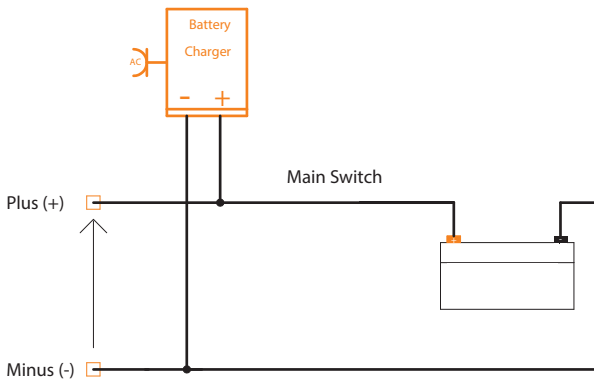


Figure 5. Connecting a charger to the Li-ion battery.

#### 4.4. Disconnecting a Li-ion battery

1. Disconnect the negative wire from the (-) terminal of the Li-ion battery.
2. Disconnect the positive wire from the (+) terminal of the Li-ion battery.

### 5. Battery use

#### 5.1. General information

- ⚠ **Warning!** Follow the safety guidelines and measures of chapter 1.

#### 5.2. Charging

- ⚠ **Warning!** Never overcharge the Li-ion battery, this will permanently damage the Li-ion battery.

- ⚠ **Caution!** Disconnect the charger from the Li-ion battery if it is not used for a long time.
- ⚠ **Caution!** To charge the Li-ion battery, use a Super B charger or charger which is suitable for charging Lithium Iron Phosphate batteries.
- ⚠ **Caution!** Charge the Li-ion battery before use.

1. Connect the charger to the Li-ion battery as described in paragraph 4.3.3
2. Charge the Li-ion battery in case of an undervoltage shutdown or if the state of charge drops below 20% to preserve the lifespan of the Li-ion battery.

### 5.2.1. Charging rate

The Li-ion battery can be charged within 25 minutes. Displayed in Table 10 are the charge rates for the Li-ion battery at different charge currents. Always respect the indicated charge current.

Charging rate		
	Charge current	
	Maximum*	Recommended charge**
Mason 12V20Ah	66 A	20 A
Mason 12V25Ah	77 A	25 A

Table 10. Charging rates at different charge currents

\* Charge time: max 25 minutes

\*\* Charge time: approximately 1 hour

## 6. Inspection and cleaning

### 6.1. General information

- ⚠ **Warning!** Never attempt to open or dismantle the Li-ion battery! The inside of the Li-ion battery does not contain serviceable parts.
1. Disconnect the Li-ion battery from all loads and charging devices before performing cleaning and maintenance activities (see paragraph 4.4).
  2. Place the enclosed protective caps over the terminals before cleaning and maintenance activities to avoid the risk of a short circuit.

### 6.2. Inspection

1. Inspect for loose and/or damaged wiring and contacts, cracks, deformations, leakage or damage of any other kind. If damage to the Li-ion battery is found, it must be replaced by a professional. Do not attempt to charge or use a damaged Li-ion battery. Do not touch the

liquid from a ruptured Li-ion battery.

2. Consider replacing the Li-ion battery with a new one if you note either of the following conditions:
  - The Li-ion battery run time drops below 80% of the original run time.
  - The Li-ion battery charge time increases significantly.

### 6.3. Cleaning

If necessary, clean the Li-ion battery with a soft, dry cloth. Never use liquids, solvents, or abrasives to clean the Li-ion battery.

## 7. Storage

Follow the storage instructions in this manual to optimize the lifespan of the Li-ion battery during storage. If these instructions are not followed and the Li-ion battery has no charge remaining when it is checked, consider it to be damaged. Do not attempt to recharge or use it. Replace it with a new Li-ion battery.

The self-discharge of the Li-ion battery is <3% per month.

Storage instructions:

1. Charge the Li-ion battery to >50% of its capacity before storage.
2. Disconnect the Li-ion battery from all loads and, if present, the charging device.
3. Place the enclosed protective caps over the terminals during storage.
4. Charge the Li-ion battery to >50% of its capacity every 1 year.

## 8. Transportation

Always check all applicable local, national, and international regulations before transporting a Lithium Iron Phosphate battery.

Transporting an end-of-life, damaged, or recalled battery may, in certain cases, be specifically limited or prohibited.

The transport of the Li-ion battery falls under hazard class UN3480, class 9. For transport over water, air and land, the battery falls within packaging group PI965 Section II.

## 9. Disposal and recycling

Always discharge the Li-ion battery before disposal unless the battery is damaged. Use electrical tape or other approved covering over the Li-ion battery connection points to prevent short circuits. Battery recycling is encouraged. Dispose the Li-ion battery in accordance with local, state and federal laws and regulations.



## 10. Troubleshooting

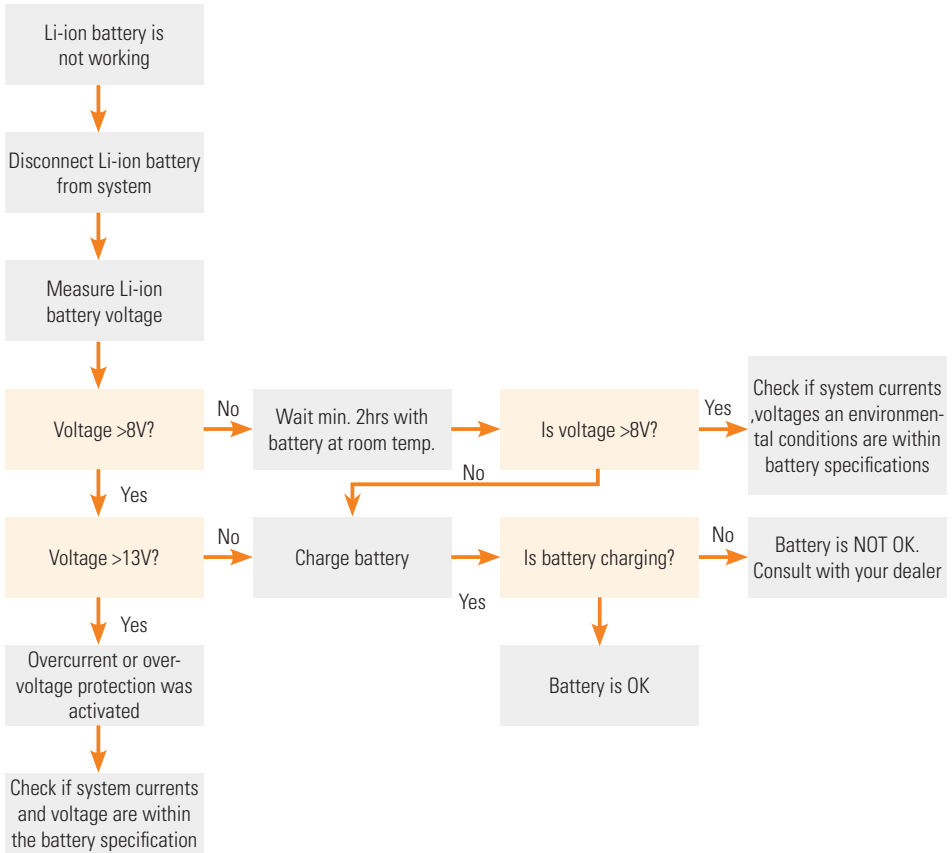


Table 11. Troubleshooting



## 11. Warranty and liability

No rights can be derived from this document. Any installation or use contrary to these instructions may void the warranty granted to you. Please refer to the sales agreement for warranty and other provisions applicable to your purchase. If the product is defective, please contact the dealer, reseller or retailer that you purchased the product from. Super B's liability for any of its products is limited to the corresponding provisions under mandatory applicable law.



For more information please contact:

Super B Lithium Power B.V.  
Europalaan 202  
7559 SC Hengelo (Ov)  
The Netherlands

Tel: +31 (0)88 0076 000  
E-mail: [info@super-b.com](mailto:info@super-b.com)  
www: [www.super-b.com](http://www.super-b.com)

